


asm1062 legacy firmware update SOP

Note: Program tool have to run it on real DOS environment, not Windows DOS mode

1. Please unzip RE1062.A22.zip and copy RE1062.A22 folder to C:\
2. Boot into DOS
3. Please into C:\RE1062.A22
4. Type " ahci.bat " to start update firmware
5. When screen shown " PASS : 1 FAIL : 0 " that's mean update finish and successful.

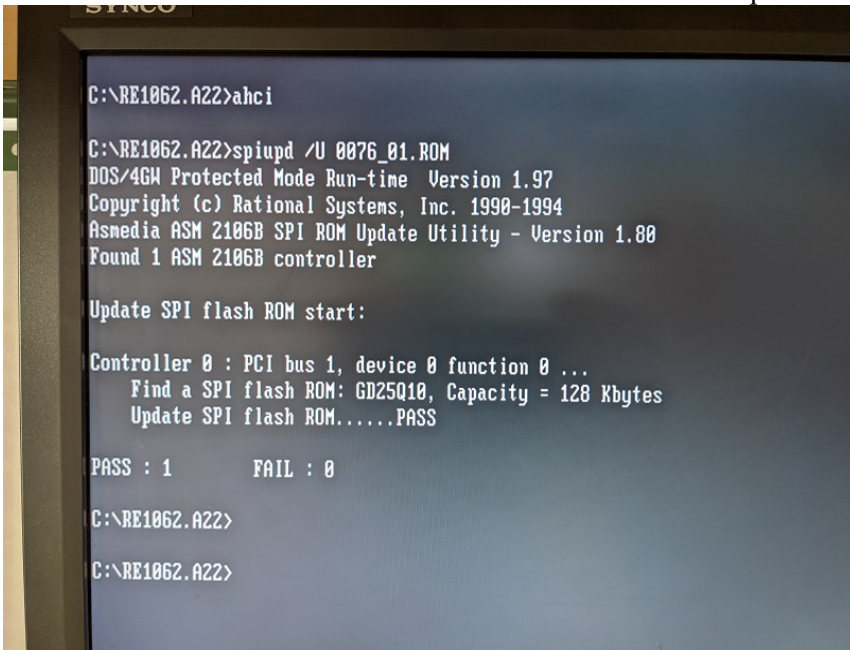

```
C:\RE1062.A22>ahci

C:\RE1062.A22>spiupd /U 0076_01.ROM
DOS/4GW Protected Mode Run-time Version 1.97
Copyright (c) Rational Systems, Inc. 1990-1994
Asmedia ASM 2106B SPI ROM Update Utility - Version 1.00
Found 1 ASM 2106B controller

Update SPI flash ROM start:


Controller 0 : PCI bus 1, device 0 function 0 ...
Find a SPI flash ROM: GD25Q10, Capacity = 128 Kbytes
Update SPI flash ROM.....PASS

PASS : 1      FAIL : 0

C:\RE1062.A22>
C:\RE1062.A22>
```

Check new Firmware version

Firmware Version: 210906 0076 01

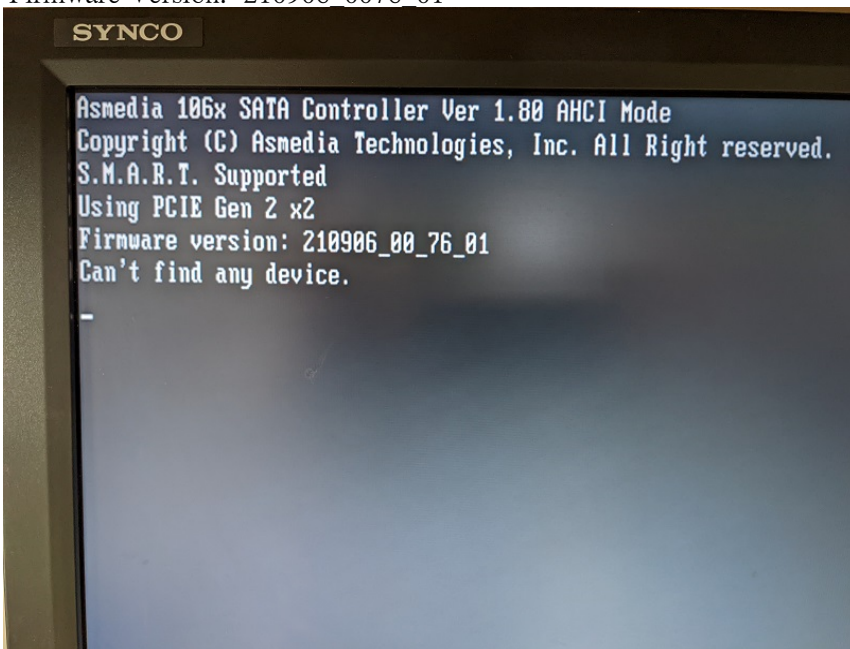

```
SYNCO

Asmedia 106x SATA Controller Ver 1.80 AHCI Mode
Copyright (C) Asmedia Technologies, Inc. All Right reserved.
S.M.A.R.T. Supported
Using PCIE Gen 2 x2
Firmware version: 210906_00_76_01
Can't find any device.

-
```